


UNITED INTERLOCK PLANK GRATING

United Interlock Grating is engineered with a strength-to-weight ratio that allows panels to withstand substantial loads while being easy to handle.

Anti-skid grating panels are the ideal choice when safe walking conditions are important. Die-formed teeth in the transverse ribs give you 360° of shoe-gripping traction even when the grating is wet, oily, muddy, or icy. Standard grating panels are 9" wide with a 2-1/2" rib depth, 18 gauge.

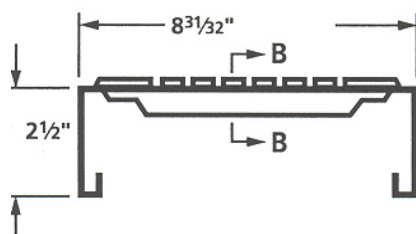

Standard Section
Double-Male Leg



9" x 18 Gauge Loads and Deflection

-----Distance between Supports (Feet)-----

2-1/2" Rib Depth	Distance between Supports (Feet)															
	2	2.5	3	3.5	4	4.5	5	5.5	6	6.5	7	8	9	10	12	14
UL	1,648	1,109	813	587	442	344	276	228	189	158	131	109	89	68	44	27
UD	0.14	0.15	0.16	0.21	0.26	0.31	0.36	0.38	0.44	0.47	0.49	0.79	0.89	1.12	1.37	1.58
CL	1,236	1,040	915	770	663	580	518	470	426	385	344	327	300	255	200	140
CD	0.12	0.14	0.16	0.18	0.21	0.24	0.28	0.29	0.30	0.37	0.46	0.61	0.74	0.91	1.2	1.5

INTERLOCK GRATING PRODUCT FEATURES

Maximizes performance and safety. . .

- Exclusive anti-skid surface provides 360° of slip resistance.
- Superior ultimate-load performance tested in accordance with AISI standards.
- All sections are made from structural-grade steel.
- Roll-formed design provides superior strength.
- Optional heel-toe side and end plates.
- Open design prevents build-up of water, grease, oil, and small debris.



**Pollution
Control
Systems, Inc**

5827 Happy Hollow Rd. Suite 1-B
Milford, OH 45150-1830
Tel: (513) 831-1165 Fax: (513) 965-4812
E-mail: Polconsys@aol.com
www.PollutionControlSystem.com