


TECHNOCHECK VALVE



Style 5002

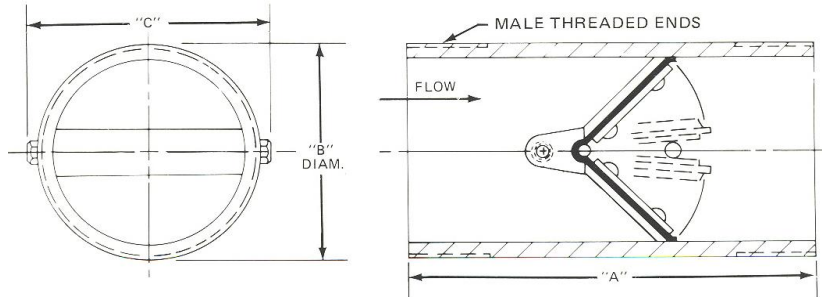

General Dimensions for Style 5002 (in inches)

SIZE	A	B	C	SIZE	A	B	C
1.00	3.50	1.32	1.62	4.00	6.00	4.5	4.88
1.25	3.50	1.66	2.0	5.00	7.00	5.56	6.12
1.50	4.00	1.90	2.25	6.00	8.00	6.62	7.12
2.00	4.00	2.38	2.75	8.00	10.00	8.62	9.50
2.50	5.00	2.88	3.25	10.00	12.00	10.75	11.50
3.00	5.50	3.50	3.88	12.00	14.00	12.75	13.75

STYLE AND MATERIALS

STYLE	BODY MATERIAL	INTERNAL MATERIAL	PSI C.W.P.
5002-AL	ALUMINUM	ALUMINUM	50
5002-BR	BRASS	BRASS	150
5002-316	316 STAINLESS STEEL	316 STAINLESS STEEL	150
5002-CLASS A	STEEL	ALUMINUM	150
5002-CLASS D	STEEL	CADMIUM PLATED STEEL	150

STANDARD ELASTOMER: BUNA-N

OPTIONAL MATERIALS	OPTIONAL SEALING MEMBER MATERIALS	
ALUMINUM	BUNA-N	-60 TO 225° F
BRONZE	NEOPRENE	-40 TO 225° F
316 STAINLESS STEEL	BUTYL	-65 TO 325° F
CADMIUM PLATED STEEL	HYPALON	-20 TO 300° F
ELECTROLESS NICKEL PLATED STEEL OR ALUMINUM	EPDM	-40 TO 350° F
MONEL*	VITON	-20 TO 400° F
TITANIUM*	TEFLON	-20 TO 450° F
HASTELLOY*	SILICONE	-100 TO 500° F
	FDA APPROVED WHITE NEOPRENE	-40 TO 225° F
*DENOTES NON-STOCK ITEM	TEMP RANGE FOR GENERAL GUIDANCE. MAY VARY.	

Spring materials are 316 Stainless Steel. Monel and Inconel spring available upon request. Consult factory for materials, sizes, and pressure ratings not shown.

Combination end configurations also available.



**Pollution
Control
Systems, Inc**

5827 Happy Hollow Rd. Suite 1-B
Milford, OH 45150-1830
Tel: (513) 831-1165 Fax: (513) 965-4812
E-mail: Polconsys@aol.com
www.PollutionControlSystem.com